




ASK ABOUT PMM ULTRA

FACTORY BLENDED
WITH SAND ADDED

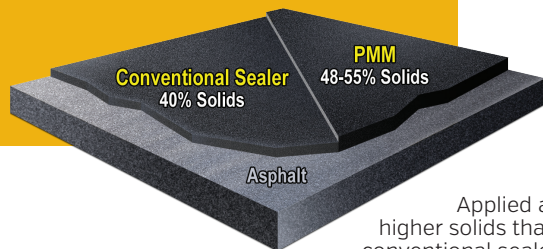

Applied at
higher solids than
conventional sealer

**Blended with polymers for superior
adhesion, flexibility, and durability**

Polymer-Modified MasterSeal Uses:

- Parking Lots
- Driveways
- Low-Traffic Roads
- Low-Speed Roads
- Airports
- Shopping Malls
- Highway Shoulders

MIXING PROCEDURES:

[Based on 100 gallons of Polymer-Modified MasterSeal]

PMM 100 gallons
Sand [40-70 mesh AFS]..... 200-400 lbs.

NOTE: If required, a small amount of water may be added to facilitate application of mixed material.


MATERIAL REQUIREMENTS: One gallon of PMM will cover approximately 85 - 95 square feet [9.4 to 10.5 square yards] per coat when properly mixed as a sand-filled coat and applied.

NOTE: Coverage rate may vary due to pavement age, porosity, and method of application.

THE INDUSTRY'S #1 CHOICE FOR
QUALITY & PERFORMANCE



POLYMER-MODIFIED MASTERSEAL™ (PMM) ASPHALT BASED PAVEMENT SEALER




POLYMER MODIFIED FOR MAXIMUM DURABILITY

Advantages:

- Added strength, adhesion, flexibility, fuel resistance, and UV resistance
- Deep, rich black color

UNSEALED VS. SEALED

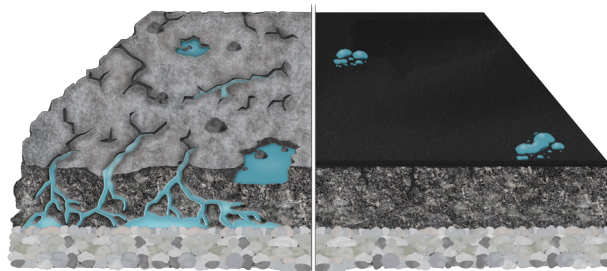

PMM replenishes the binder that is lost through weathering and aging and provides a barrier to moisture intrusion as well as ultraviolet rays, chemicals and salt. PMM beautifies pavement, enhancing the image and curb appeal of commercial properties, home driveways, roadways and more.

PRODUCT #	DESCRIPTION	WEIGHT	PRICE
S1097P	5 - Gallon Pail	51 lbs.	\$42.99
S1097D	55 - Gallon Drum	565 lbs.	\$431.99
S1097B	Bulk	-	- quoted -